

DL series

5"/6" SURFACE MOUNT DOWNLIGHT

15K

KOMEET

simple & smart

Product Features

- DL Series Surface Mount Downlight can be used in a variety of applications.
- Up to 80% in energy savings compared to incandescent bulbs
- 10%-10% dimming range
- White trim, frosted lens
- Includes standard E26 adapter
- ETL / cETL Listed, Energy Star
- 1 Year Warranty




Application

General ambient lighting, Retail store lighting, Museums, Showrooms, Hotels, Stairways, Lobbies, etc.

Specifications

Input Voltage	AC 120V
Frequency	50~60HZ
Color Temperature	5000, 4000, 3000, 2700K*
Efficacy	Up to 80 lm/W
Color Rendering Index	90
Distribution	Frosted Lens
IP Rating	Damp Location
Beam Angle	120°
Life Span	50,000 hrs
Control	100%-10% Dimming

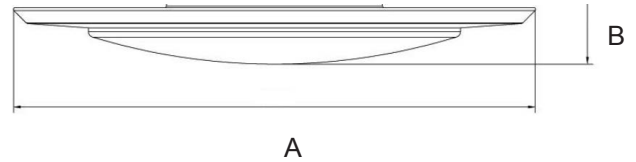

Dimensions

Power	A	B
15W	ø185mm (ø7.28")	27.5mm (1.08")

Order Code (Example: KMDL-1550F-WHS)

Part #	Wattage	CCT	Lens	Finish	Input
KMDL	15 - 15W	50 - 5000K (1200 lm) 40 - 4000K (1150 lm) 30 - 3000K (1100 lm) 27 - 2700K (1050 lm)*	F - Frosted Lens	WH - White	S - 120V

*2700K to be discontinued in Q3, 2018

Rev.030818

Specifications are subject to change without notice