

LHN series

LED NARROW LINEAR HIGHBAY
90W / 130W / 180W

KOMEET
simple & smart


Product Features

- LHN Series Narrow Linear Highbay can be used in Warehouse, Factories, Retail, Commercial Lighting, etc. It is equivalent to 4 - 10 fluorescent highbay lamps
- White-finished aluminum alloy housing for effective thermal management
- For applications with ceiling heights of **12 - 45 ft**
- Cable Kit as standard mounting, option for Chain Mount and Pendant
- Lumen output range from 11700 - 23500 lm @ 130 lm/W
- Available with Occ Sensor or Combo Sensor
- Compatible with EM backup, up to 90 mins
- 10kV in-line surge protector available as option
- UL / cUL Listed, DLC Premium



Application

Warehouses, Factories, Gymnasiums, Auto Maintenance, Commercial Lighting, Retail Applications

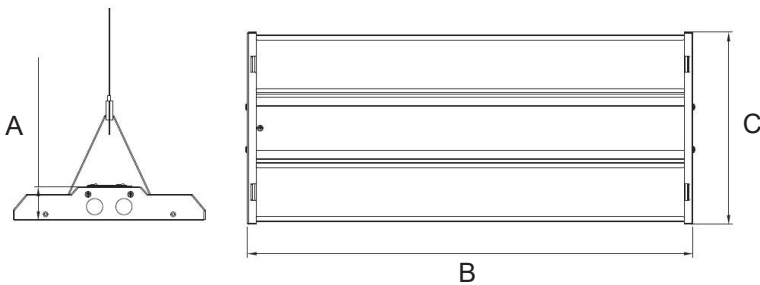

Dimensions

Power	A	B	C
90W	46mm (1.83")	608mm (23.92")	262mm (10.31")
130W	46mm (1.83")	608mm (23.92")	262mm (10.31")
180W	46mm (1.83")	608mm (23.92")	262mm (10.31")

Order Code (Example: KMLHN-18050F-PWHUD)

Part #	Wattage	CCT	Distribution	Mounting	Finish	Input Voltage & Dimming
KMLHN	90 - 90W (11700 lm) 130 - 130W (16900 lm) 180 - 180W (23500 lm)	50 - 5000K 40 - 4000K	F - Frosted Diffused Lens	CK - Cable Kit CM - Chain Mount P - Pendant	WH - White	UD - 110-277V & 0-10V Dimming H - 347V, 480V

Option

Part #	Description
A-OCC-HBP-111-L7	Combo Sensor with IR Capabilities
A-OCC-HBP-112-L7	OCC Sensor
A-SG10	10kV Surge Protection
A-EMB-700	Fullham 700 Lumen Package EM*
A-EMB-1400	Fullham 1400 Lumen Package EM*
A-EMB-2000	Fullham 2000 Lumen Package EM*

*Refer to EM Manufacturer Spec sheets for detail.
Specifications are subject to change without notice

Rev.051518