

# 7 De series

LED 75 BCDM @ <H  
30W / 60K / 100W / 120W / 200W

**KOMEET**  
simple & smart

## Product Features


- CPe Series Canopy Light can be used in Parking Garages, Shopping Area Walkways, etc. It is equivalent to 75W - 400W MH
- Aerospace-grade composite material module for excellent thermal management and durability
- Pre-installed standard surface mount bracket and built-in 3/4" threaded pipe
- Factory pre-treated and powder-coated to meet the most rugged industry standards
- Optic lens available in Type III and V distribution patterns
- Available with Photocell and Bi-level Motion option (photocell included with sensor)
- Emergency Battery option for models up to 100W, 90 minute duration at 10% output (Option)
- Built-in surge protection up to 10kV (Option)
- IP65 Rated suitable for wet applications
- UL / cUL Listed, DLC 4.2 Listed



30W / 60W

## Application

Parking Garages, Storage Area, Shopping Area Walkways, etc.

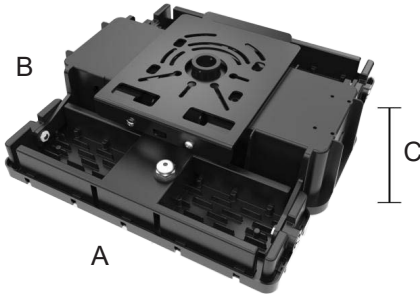

## Dimensions

Power	A	B	C
<b>30W</b>	305mm (12.00")	311mm (12.25")	101mm (4.00")
<b>60W</b>	305mm (12.00")	311mm (12.25")	101mm (4.00")
<b>100W</b>	305mm (12.00")	311mm (12.25")	101mm (4.00")
<b>120W</b>	305mm (12.00")	492mm (19.25")	101mm (4.00")
<b>200W</b>	305mm (12.00")	492mm (19.25")	101mm (4.00")

## EM Lumen Package

Fullham 700 Lumen	Fullham 1400 Lumen	Fullham 2000 Lumen
FHSCP-UNV-5WL	FHSCP-UNV-10.7WL	FHSCP-UNV-13.7WL

\*Refer to EM Manufacturer Spec sheets for detail.

## Order Code ( Example: KMCPe-120403MCJMDBUD-P)

Part #	Wattage	CCT	Distribution	Mounting	Finish	Input Voltage & Dimming
<b>KM7 De</b>	<b>30</b> - 30W (3900lm) <b>60</b> - 60W (7800lm) <b>100</b> - 100W (13000lm) <b>120</b> - 120W (15600lm) <b>200</b> - 200W (26000lm)	<b>50</b> - 5000K <b>40</b> - 4000K <b>30</b> - 3000K	<b>3M</b> - Type III Medium <b>5M</b> - Type V Medium	<b>JM</b> - Surface Mount with 3/4" threaded pipe included	<b>86</b> - Black <b>WH</b> - White	<b>U</b> - 110-277V <b>UD</b> - 110-277V & 0-10V Dimming* <b>H</b> - 347V, 480V

\*0-10V dimming only available in universal input  
Specifications are subject to change without notice.

Rev.040318

## Option

Part #	Description
<b>A-WP-PH-U</b>	Photocell
<b>A-OCC-HBP-112-L7</b>	Combo Sensor**
<b>FHSCP-UNV-5WL</b>	Fullham 700 Lumen Package EM
<b>FHSCP-UNV-10.7WL</b>	Fullham 1400 Lumen Package EM
<b>FHSCP-UNV-13.7WL</b>	Fullham 2000 Lumen Package EM

\*\*Wattstopper FSP-211. Please refer to Wattstopper specifications sheet.