

Client: _____ Project: _____ Type: _____ Qty: _____

Technical Specifications

- INPUT VOLTAGE**
AC 110~277V
- FREQUENCY**
50~60HZ
- COLOR TEMPERATURE**
4000K, 5000K
- COLOR RENDERING INDEX**
75
- DISTRIBUTION**
Clear Prismatic Lens
- IP RATING**
IP65
- OPERATING TEMPERATURE**
-40°C~+40°C
- LIFE SPAN**
50,000hrs
- DIMMING**
0-10V



Product Showcase


FEATURES

- Equivalent to 75W - 275W MH lamps.
- Die cast ADC12 aluminum for excellent thermal management and durability.
- Factory pre-treated and powder-coated to meet the most rugged industry standards.
- Heat-resistant polycarbonate lens.
- Built-in surge protection up to 4kV.
- IP65 Rated suitable for wet applications.
- UL/cUL Listed, DLC 4.2 Listed.



Product Features

Dimensions

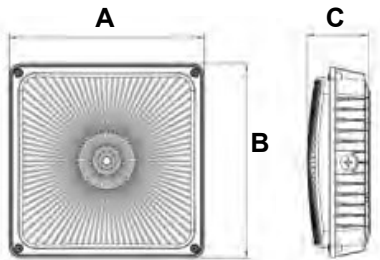

A	B	C
243mm (9.57")	243mm (9.57")	77.93mm (3.07")

Ordering Information

KMCP - **PL - JM**

Series	Wattage	CCT	Distribution	Mounting	Finish	Input Voltage & Dimming
KMCP	30 - 30W (2900lm)	50 - 5000K	PL - Prismatic Lens	JM - Surface Mount 3/4" threaded pipe connector	DB - Dark Bronze WH - White	U - 110-277V
	45 - 45W (4200lm)	40 - 4000K				UD - 110-277V & 0-10V Dimming*
	65 - 65W (6700lm)					

Accessories/Option Adder

Part #	Description
A-EMB-700	External Emergency Battery 700LM
A-EMB-1400	External Emergency Battery 1400LM
A-EMB-2000	External Emergency Battery 2000LM
A-PH-PB-U	Button Photocell 110-277V
A-SENSOR-112	End Mount Motion Sensor 110-277V (Damp Location)

Specifications are subject to change without notice.

Rev: 100118