

Client: \_\_\_\_\_ Project: \_\_\_\_\_ Type: \_\_\_\_\_ Qty: \_\_\_\_\_

Technical Specifications

**INPUT VOLTAGE**

AC 110~277V, 347V, 480V

**FREQUENCY**

50~60HZ

**COLOR TEMPERATURE**

4000K, 5000K

**COLOR RENDERING INDEX**

80

**DISTRIBUTION**

45°, 90°

**IP RATING**

IP65

**OPERATING TEMPERATURE**

-30°C~+55°C

**LIFE SPAN**

75,000hrs

Product Showcase




**FEATURES**

- High performance LED energy and maintenance lighting solution with an output that exceeds 1500W MH
- Made from die cast ADC-12 aluminum. Patented heat-sink design adopts tensile aluminum fins for outstanding thermal management and luminaire durability.
- Factory pre-treated and powder-coated to meet the most rugged industry standards.
- IP65 Rated suited for outdoor / wet applications.
- UL / cUL Listed, DLC 4.2 Listed.



Product Features

Dimensions

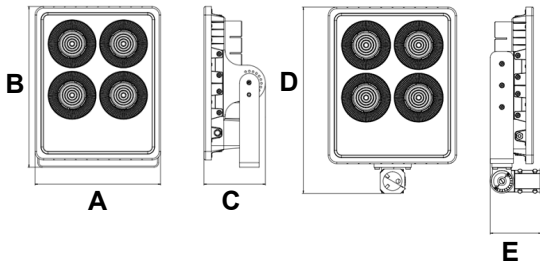

A	B	C	D	E	SF	EPA
415mm (16.33")	531mm (20.91")	203mm (7.99")	603mm (23.74")	164mm (6.46")	2 3/8" Pipe	2.85ft <sup>2</sup>

Ordering Information

**KMK** -  Wattage  CCT **W** -  Mounting **DB**  Input Voltage

Series	Wattage	CCT	Distribution	Mounting	Finish	Input Voltage
KMK	300 - 300W (36000lm)	50 - 5000K	45 - 45°	YM - Yoke SF - Slipfitter	DB - Dark Bronze	U - 110-277V H - 347V, 480V
	450 - 450W (54000lm)	40 - 4000K	90 - 90°			

**Accessories/Option Adder**

Part #	Description
A-PH-PB-U	Button Photocell 110-277V
A-PH-PT-U	Twistlock Photocell 110-277V/480V
A-SP-LSP4	10kV Surge Protector