

Client: _____ Project: _____ Type: _____ Qty: _____

Technical Specifications

- INPUT VOLTAGE**
AC 100~277V
- FREQUENCY**
50~60HZ
- COLOR TEMPERATURE**
3000K, 4000K, 5000K
- COLOR RENDERING INDEX**
75
- DISTRIBUTION**
Type III & V Medium
- IP RATING**
IP65
- OPERATING TEMPERATURE**
-30°C~+55°C
- LIFE SPAN**
75,000hrs



Product Showcase


FEATURES

- Simple and effective design with hallowed heat-sink for effective heat dissipation.
- Factory pre-treated and powder-coated to meet the most rugged industry standards.
- IP65 Rated, suitable for outdoor / wet applications.
- ETL Listed, DLC Listed.



Product Features

Dimensions

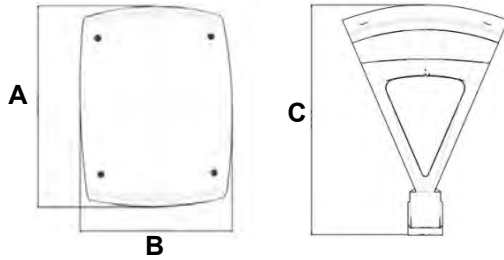

A	B	C	EPA
558mm (22.00")	400mm (15.75")	558mm (22.00)	---

Ordering Information

KMPT - - **DB**

Series	Wattage	CCT	Distribution	Mounting	Finish	Input Voltage
KMPT	100 - 100W (12000lm)	50 - 5000K	3M - Type III Medium	SF - 2-3/8" Tenon Adapter	DB - Dark Bronze	U - 110-277V H - 347/480V
	150 - 150W (18000lm)	40 - 4000K	5M - Type V Medium	SF3 - 3" Tenon Adapter		
	200 - 200W (23000lm)	30 - 3000K		SF4 - 4" Tenon Adapter		
	300 - 300W (34500lm)			SF5 - 5" Tenon Adapter		

Accessories/Option Adder

Part #	Description
A-PH-PT-U / A-PH-PT-H	Twist Lock Photocell (110-480V)
A-SP-LSP4	10kV Surge Protector